



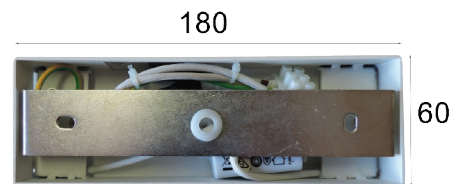

DUBAIG2

LED Interior Surface Mounted Wall Light

- Input voltage: 220-240V AC 50/60Hz
- Inbuilt constant current LED driver included
- Driver output voltage: 12-22V
- Driver input current: 0.11A
- Driver output current: 0.3A
- Power factor: 0.5
- Material: iron & aluminium powder coated white & acrylic
- Ambient Temp: -20 to 50°C (The life of the lamp will gradually reduce if used outside these temperature parameters)
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors

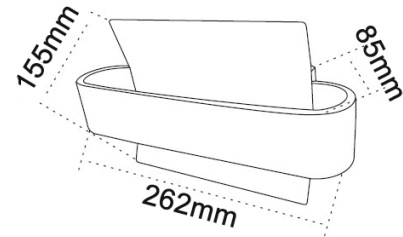

back plate
 Depth: 30mm
 Mounting U Bracket: 170x30mm
 Central 7mm cable entry

30,000hr Lifetime	120° Beam Angle	IP20 Rated	2YEAR Replacement Warranty
----------------------	--------------------	----------------------	---

PART NO.	KELVIN (K)	LUMENS (LM)	Lumious Efficiency (lm/W)	WATT (W)	LEDs	CRI	WEIGHT (Kg)	BOX (cm)	CARTON QTY
DUBAIG2	3000	460	71	6	36pcs 2835	>=80	1.0	28x19.5x9.5	12

Brochure updated on 11.05.2018

