


DIMMABLE SURFACE SERIES

Dedicated LED Surface Mounted Lights



LYNX ▶

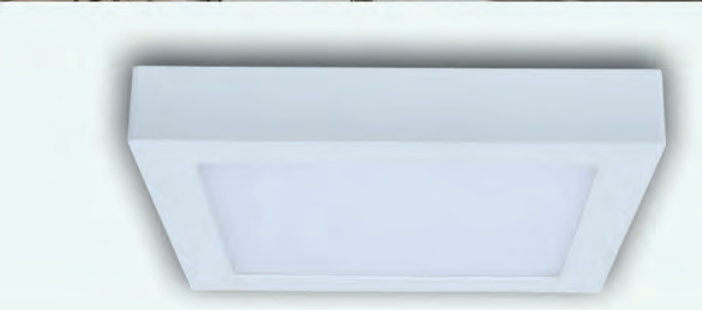

PRODUCT FEATURES

- Input voltage: 180-265V AC 50/60Hz
- SMD2835 LED chips
- Power factor: 0.9
- Material: PC body, PMMA frosted diffuser
- Designed in Australia
- Ambient temp: -20 to 40°C (The life of the lamp will gradually reduce if used outside these temperature parameters)
- Suitable for use with 3 wire motion or microwave sensor
- Suitable for 2-way switching
- Large terminal holes for easy connection

RECOMMENDED DIMMERS:

BRAND	CODE
CLA - Trailing Edge	VELA
CLA - Trailing edge	LYNX
Dignet - Ledsmart	MMDM/PB
Dignet - Ledsmart	MMDM/RT
Clipsal - Universal	32ELEDM
Clipsal - Universal	32E450UDM
HPM - Trailing Edge	CAT400T



CODE	SHAPE	KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	IP RATING	PCS PER DIMMER	DIAM/WIDTH (MM)	DEPTH (MM)	WEIGHT (kg)	BOX (cm)	CARTON QTY
SURFACE1D	RND	3000	450	6	82	IP20	2-14	Ø120	40	0.25	13.2x13x4.5	40
SURFACE2D	RND	3000	900	12	82	IP40	2-9	Ø178	40	0.47	19x19x5	20
SURFACE3D	RND	3000	1450	18	82	IP20	2-5	Ø225	40	0.65	24x24x5	20
SURFACE4D	RND	5000	480	6	82	IP20	2-14	Ø120	40	0.26	13.5x13.5x5	40
SURFACE5D	RND	5000	960	12	82	IP40	2-9	Ø178	40	0.47	19.5x19.5x5	20
SURFACE6D	RND	5000	1550	18	82	IP20	2-5	Ø225	40	0.65	24x24x5	20
SURFACE7D	SQ	3000	450	6	82	IP20	2-14	120x120	40	0.25	13.2x13x5	40
SURFACE9D	SQ	3000	1450	18	82	IP20	2-5	225x225	40	0.65	24x24x5	20
SURFACE12D	SQ	5000	1550	18	82	IP20	2-5	225x225	40	0.65	24x24x5	20