

NEOLITE Flexible LED Strip

IP67 WEATHERPROOF



IMAGE	PART NUMBER	SMD	IP RATING	LED PER METRE	LUMENS PER METRE	VOLTAGE	WATTAGE PER METRE	MAX LENGTH	CUTTING INCREMENT	SIZE WXH
	HV9791-IP67-140-3K	2835	IP67	140	400lm	24v DC	9.6w/m	5m	50mm	4x8mm
	HV9791-IP67-140-4K	2835	IP67	140	405lm	24v DC	9.6w/m	5m	50mm	4x8mm
	HV9791-IP67-140-5K	2835	IP67	140	410lm	24v DC	9.6w/m	5m	50mm	4x8mm
	HV9791-ALU	Aluminum Channel to suit HV9791 - custom cut length up to 3m								
	HV9791-PVC-CHANNEL	White PC Channel to suit HV9791 - Supplied in 1m lengths only								
IMAGE	PART NUMBER	SMD	IP RATING	LED PER METRE	LUMENS PER METRE	VOLTAGE	WATTAGE PER METRE	MAX LENGTH	CUTTING INCREMENT	SIZE WXH
	HV9792-IP67-140-3K	2835	IP67	140	600lm	24v DC	14.4w/m	5m	50mm	6x11mm
	HV9792-IP67-140-4K	2835	IP67	140	630lm	24v DC	14.4w/m	5m	50mm	6x11mm
	HV9792-IP67-140-5K	2835	IP67	140	660lm	24v DC	14.4w/m	5m	50mm	6x11mm
	HV9792-ALU	Aluminum Channel to suit HV9792 - custom cut length up to 3m								
	HV9792-PVC-CHANNEL	White PC Channel to suit HV9792 - Supplied in 1m lengths only								

RGB NEOLITE Flexible LED Strip

IP67 WEATHERPROOF



IMAGE	PART NUMBER	SMD	IP RATING	LED PER METRE	LUMENS PER METRE	VOLTAGE	WATTAGE PER METRE	MAX LENGTH	CUTTING INCREMENT	SIZE WXH
	HV9792-IP67-336-RGB	2216	IP67	336	600lm	24v DC	14.4w/m	5m	63mm	6x11mm


NEOLITE Flexible LED Strip

IP67 WEATHERPROOF



RGB NEOLITE Flexible LED Strip

IP67 WEATHERPROOF

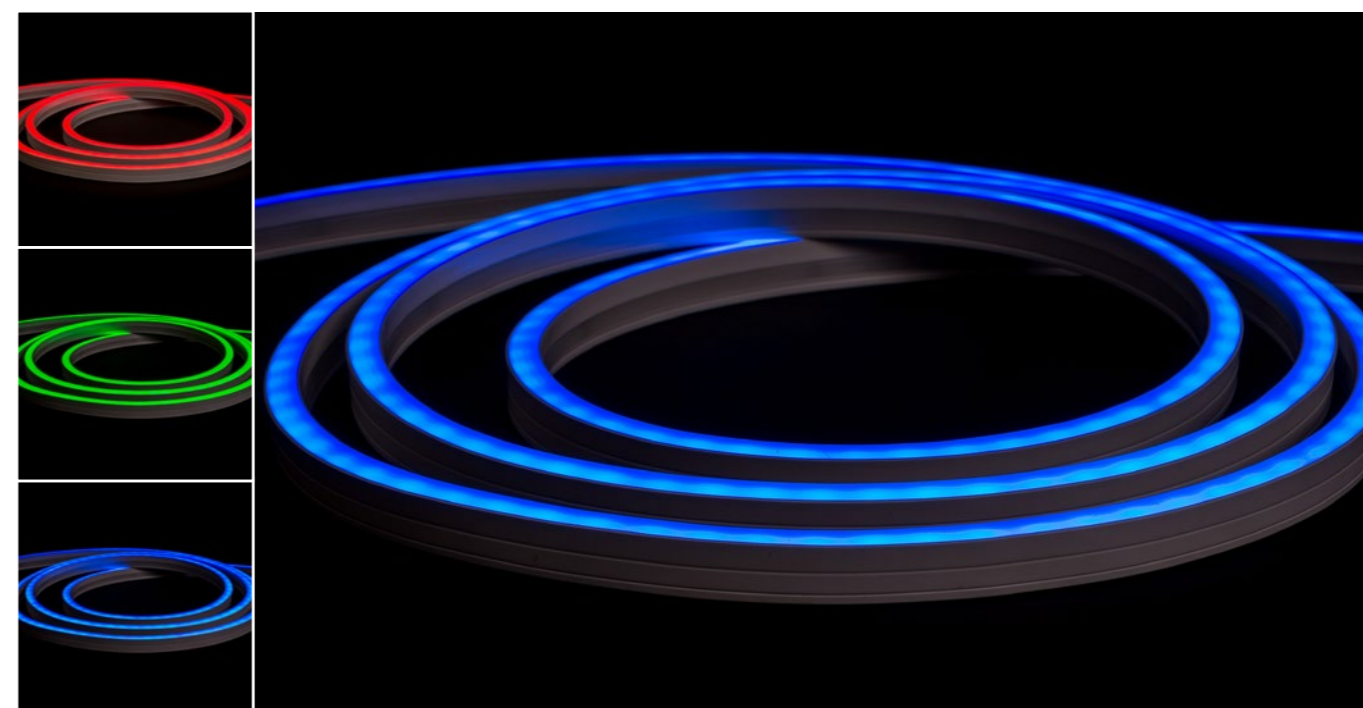

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 275 - 282
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 362

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 275 - 282
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 362