

Klip 316 Stainless Steel

- Inground uplighter round
- Stainless Steel 316 Marine Grade cover
- Beam angle: 120°
- Flush tempered glass
- Trafficable to 1000kg
- Face diameter: 260mm
- Installation depth: 130mm
- **NOTE: adequate drainage must be allowed**
- IK Rating: IK10
- IP Rating: IP67

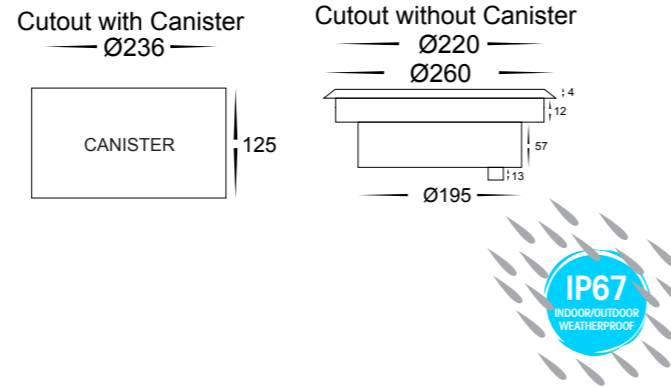


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1835C-12V	5500K	2700lm	12v DC	Built-in 30w
	HV1835W-12V	3000k	2400lm		
	HV1835C-240V	5500K	2700lm	240v	Built-in 30w
	HV1835W-240V	3000k	2400lm		
OPTIONAL ACCESSORIES					
	HV1835-FSH	316 Stainless Steel Security Face with screw holes to suit HV1835 range			
	HV1835-HC	Honeycomb glare reduction lens to suit HV1835 range			

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

Split 316 Stainless Steel

- Inground uplighter round
- Stainless Steel 316 Marine Grade cover
- Full stainless steel body
- Anti glare honeycomb louvre
- Beam angle: 60°
- Flush tempered glass
- Trafficable to 1000kg
- Face diameter: 100mm
- Installation depth: 75mm
- **NOTE: adequate drainage must be allowed**
- IK Rating: IK10
- IP Rating: IP67

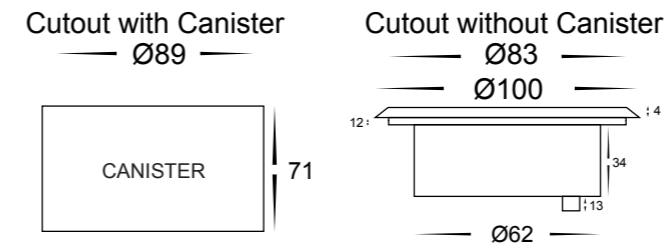


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1841C	5500K	300lm	12v DC	Built-in 3w
	HV1841W	3000k	240lm		
OPTIONAL ACCESSORIES					
	HV1841 - FSH	Security Face with screw holes to suit HV1841 range			

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336