

# Mini Bollard


Cat. No. BOLMINI



The Mini Bollard (95mm) is ideal for garden edges. The lens reflects light at two angles through an anti-glare mesh directly onto the ground and horizontally to illuminate the surrounding landscape.

Constructed of tubular aluminium with a UV stable powder coated finish or machined from solid copper or 316 stainless steel.

## Ordering Information

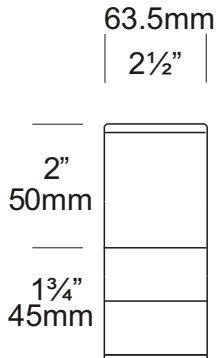

### Luminaire Type

BOLMINI - Mini Bollard

### Material/Finish

BK - Black  
BZ - Bronze  
GN - Green  
STAR - Silver Star  
WH - White  
WB - Birch  
DG - Dark Grey  
OG - Olive Green  
RG - Beige  
PR - Primrose  
COP - Copper  
SS - 316 Stainless Steel

### Accessories

CJK150 - Cable Joint Kit  
HOOD140 - Anti Glare Hood  
LENSBOLOP - Opaque Lens

For **LED** options, refer to page  
10.4.1 (G4 JC LED),  
10.4.6 (Wafer LED) or  
<http://hunza.co.nz/l.html>



Ordering Example: BOLMINI BK - Mini Bollard in Black

HOOD140 BZ - Anti Glare Hood in Bronze

(Accessories ordered separately)

**HUNZA**™ PURE  
OUTDOOR  
LIGHTING

**HUNZA FACTORY**  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
[hunza@hunza.co.nz](mailto:hunza@hunza.co.nz)  
[www.hunza.co.nz](http://www.hunza.co.nz)

**INTERNATIONAL CONTACTS:**  
[www.hunza.co.nz/contacts.php](http://www.hunza.co.nz/contacts.php)

Specifications may change without notice.  
Manufactured in New Zealand.  
© 2011 Hunza Holdings Ltd.

Ver 1.4

## Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") with chromate substrate and high UV resistant polyester powder coat.

**Colours** Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

**Copper** 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½").

**316 Stainless Steel** 63.5mm (2½") x 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½").

## Mounting

For mounting on top of posts, railings, etc. It is not suited for ground installation.

## Features

### Lens:

UV stable acrylic with anti-glare mesh projects light horizontally and at 45° onto the ground.

### Gasket:

Silicone, iron impregnated 220°c (428°f).

### Lamp Holders:

G4 - 350°c (662°f) ceramic multi contact lamp holder with 250°c (480°f) teflon cables.

### Accessories:

Cable Joint Kit (Cat. CJK150)  
Anti-Glare Hood - Not available in stainless steel (Cat. HOOD140).  
Opaque Lens (Cat. LENSBOLOP).

## Standards

IP66  UL1838

## Luminaire Weight

Alum .37kg (13oz)  
Cop .6kg (1lb 5oz)  
SS .5kg (1lb 1oz)

## Power Supply

HUNZA™ Inground or Wall Mount Transformer: not included.

USA and Canada:

HUNZA™ Wall Mount Transformer: not included.

Luminaire: supplied with

G4 20 watt lamp max.

**LED** - Refer to previous page.

USA and Canada:

G4 20 watt lamp max.

**LED** - Refer to previous page.

**HUNZA**™ PURE  
OUTDOOR  
LIGHTING

**HUNZA FACTORY**  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunza.co.nz

**INTERNATIONAL CONTACTS:**  
www.hunza.co.nz/contacts.php

Specifications may change without notice.  
Manufactured in New Zealand.  
© 2011 Hunza Holdings Ltd.

Ver 1.4