


Single Pole Lite

- Cat. No. SPL
- Cat. No. SPL/R
- Cat. No. SPLGU
- Cat. No. SPLMH20
- Cat. No. SPLMH35

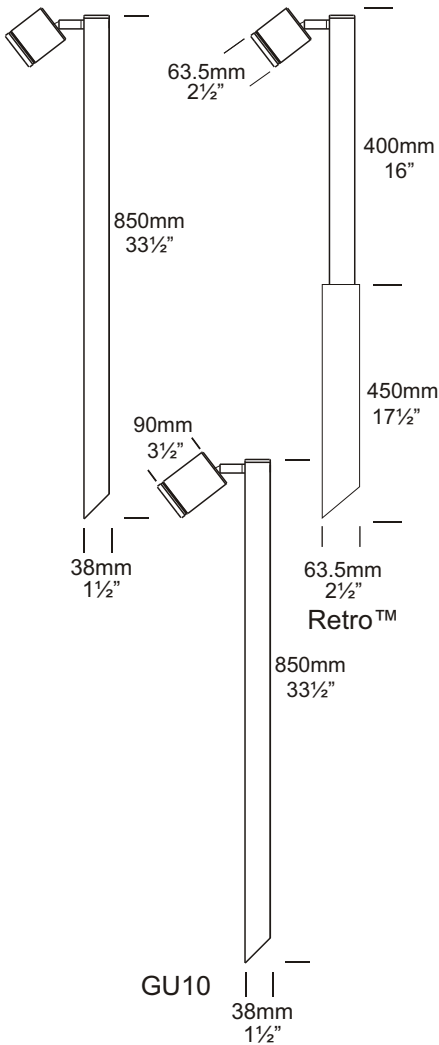

The Single Pole Lite has an individual spotlight which can be aimed in any direction. The fixture is ideal for path lighting as well as tree lighting, or the head may be aimed downward to eliminate vertical light. The fitting has a fully adjustable arm allowing 360 degree rotation and 0 - 90 degree elevation.

The Retro™, which is a mains option, avoids the need to bury a transformer. The 110/240-12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer, this changes the luminaire to an IP56 rating.

A GU10 version of this luminaire is also available for line voltage lamps. The Single Pole Lite Metal Halide is extremely energy efficient, outputting 2-3 times the light of a halogen lamp, and uses a GX10 20 or 35 watt lamp.

Ordering Information

Luminaire Type	Material/Finish	Accessories
SPL - Single Pole Lite	BK - Black BZ - Bronze GN - Green STAR - Silver Star WH - White WB - Birch DG - Dark Grey OG - Olive Green RG - Beige PR - Primrose COP - Copper SS - 316 Stainless Steel	CJK150 - Cable Joint Kit LENSSTEPF - Frost Lens GG - Glare Guard (Not for Metal Halide) HCL - Hex Cell Louvre Adaptor /R - Retro™ Transformer 110/240-12 volt GU - GU10 Option MH - Metal Halide Option For LED options, refer to page 10.4 (dedicated LED), 10.4.3 (6 watt), 10.4.4 (3 watt) or http://hunza.co.nz/l.html

Ordering Example: SPL SS - Single Pole Lite in 316 Stainless Steel
 SPL/R COP - Single Pole Lite Retro™ in Copper
 SPLGU COP - Single Pole Lite GU10 in Copper
 SPLMH20 BK - Single Pole Lite Metal Halide 20 watt in Black
 HCL - Hex Cell Louvre Adaptor
 (Accessories ordered separately)



Single Pole Lite

Metal Halide version
63.5mm diameter pole

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2011 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") rod, with chromate substrate and high UV resistant polyester powder coat - Colours Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

Copper 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

316 Stainless steel 9mm (11/32") End cap - solid 316 stainless steel 63.5mm (2½") rod.

Poles: Aluminium, Copper, 316 Stainless steel 38mm (1½") x 850mm (33½") tube.

Retro™: Pole - 38mm (1½") x 410mm (16") tube.

Transformer Pole 63.5mm (2½") x 440mm (17½").

Mounting

Pole 850mm (33½") directly mounted into the earth. Retro™ - set in concrete.

Features

Lens:
10mm (3/8") clear 'flush fit' shatter resistant glass. Lifetime Warranty.

Gaskets:
Silicone, iron impregnated 220°C (428°F).

Lamp Holder:
GU5.3 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Metal Halide GX10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK150).
Not approved for USA/Canada.
Frosted Lens (Cat. LENSSTPEF).
Glare Guard (Cat. GG).
Hex Cell Louvre Adaptor (Cat. HCL).
Retro™ transformer 110/240-12 volt IP56 (Cat. /R).
GU10 Option (Cat. GU).
Metal Halide Option (Cat. MH).

Swivel:

Aluminium and Copper luminaires 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires 360° rotation and 0 - 90° elevation, full stainless steel construction.

Standards

IP56/IP66  UL1838

Luminaire Weight

12 volt: Alum 1.000kg (2lb 3oz)
Cop 2.300kg (5lb 1oz)
SS 2.100kg (4lb 10oz)
Retro™ Alum 2.100kg (4lb 10oz)
Cop 3.300kg (7lb 4oz)
SS 3.150kg (6lb 15oz)

Power Supply

HUNZA™ Inground or Wall Mount
Transformer: not included.

Metal Halide - 230-240 volt ac 50Hz
built in ballast

RETRO™ IP56

HUNZA™ 110/240-12 volt ac silicone encapsulated electronic transformer is built into the pole. Dimmable with a suitable dimmer.

USA and Canada:

HUNZA™ Wall Mount Transformer: not included.

Metal Halide - 120 volt ac 60Hz
built in ballast

Luminaire: supplied with

MR16 GU5.3 20, 35, 50 watt lamp max.
Retro™ MR16 GU5.3 20, 35, 50 watt lamp max.

GU10 - GU10 25 or 35 watt lamp max.
LED - Refer to previous page.










Metal Halide - GX10 20 or 35 watt lamp

USA and Canada:

MR16 GU5.3 20 watt lamp (35 watt lamp max with glare guard fitted)

GU10 Halogen - Lamp not supplied
LED - Refer to previous page.

Metal Halide - GX10 20 or 35 watt lamp



HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2011 Hunza Holdings Ltd.

Ver 1.4