



LED UFO LIGHT

SHB25 UFO II

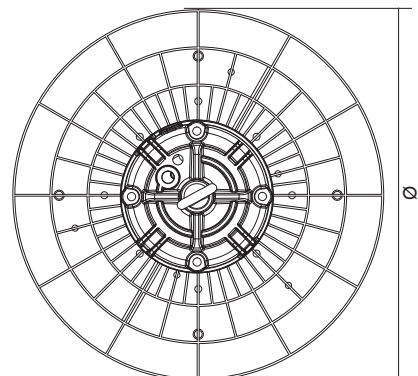

DIMENSIONS

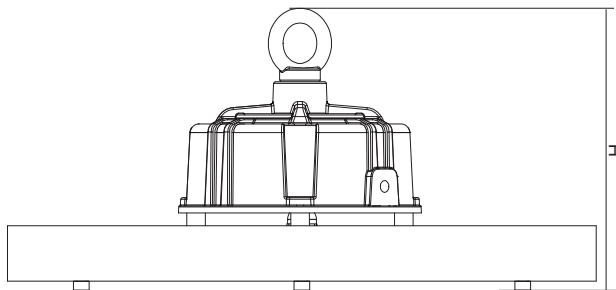

CONSTRUCTION

- Die-cast aluminium body
- Powder coated finish
- High efficiency SMD LED chips
- Clear tempered glass diffuser
- Built-in constant current 1-10V dimmable LED driver
- IP66 PVC cable gland
- 2 m rubber flex & 3 pin plug fitted

IP RATING

- IP65 weatherproof

BEAM ANGLE

- 120° lens (standard)

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Colour	Dimensions Ø x H	Net Weight
SHB25/80	240V	80W	12000lm	5700K	120°	>80	Black	320 mm x 120 mm	2.94 kg
SHB25/120	240V	120W	18000lm	5700K	120°	>80	Black	320 mm x 120 mm	3.52 kg
SHB25/180	240V	180W	27000lm	5700K	120°	>80	Black	400 mm x 130 mm	6.34 kg



www.sal.net.au

Specifications above are for reference only and may vary without prior notice