





ALBANY S9514TC - 28/36W

Recessed LED rectangular Shop Light with selectable colour temperature and power.

Application

Ideal for any retail or commercial interior spaces

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch
- Twin 28W / 36W setting with the integral DIP switch
- Adjustable up to 60 degree, IC 4 rated.
- Constant current non-dimmable LED driver, complete with flex and plug.
- Stylish white or silver powder coat finish
- High efficiency SMD LED chips.



Dimmable - OPTIONAL

Dimmer Type - Trailing edge, 1-10V, DALI / DSI























Technical Specification

| Model No. | Input Voltage (V/AC) | Multiple Wattage | Lumens (lm) | ССТ (К) | Beam Angle (°) | Dimmable |
|------------|-------------------------|---------------------|----------------|----------------|-------------------|----------|
| S9514TC WH | 240 | 28/36 | 2800/3600 | 3000/4000/5500 | 100 | OPTIONAL |
| S9514TC SL | 240 | 28/36 | 2800/3600 | 3000/4000/5500 | 100 | OPTIONAL |

Technical Specification


| Model No. | CRI | Body Colour | Dim (mm) | IPART | REES |
|------------|-----|-------------|--------------------------|-------|------|
| S9514TC WH | 80 | WHITE | 228(L) x 144(W) x 115(H) | YES | YES |
| S9514TC SL | 80 | SILVER | 228(L) x 144(W) x 115(H) | YES | YES |

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".





Dimensions

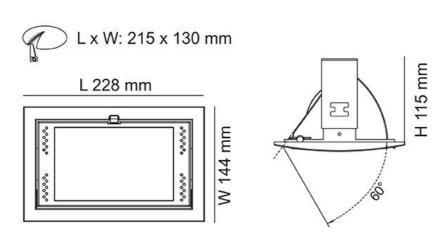





Photometric Data

Unit: cd C0/C180_____ C90/C270____

S9514TC at 3000K

