



ECOSTAR S9046SM - 9W

Surface mount dimmable 9 watt LED downlight

Application

Ideal for any interior residential or commercial surface mount application

Design Specifications

- Precise pressed metal surface mount profile
- Stylish white powder coat finish
- S9046 LED downlight kit included
- Integral constant current trailing edge dimmable LED driver
- Standard 60 degree beam distribution, optional 40 degree.

Performance

Dimmable - **YES**

Dimmer Type - **Trailing edge, optional 1-10V, DALI / DSI**



-
-
-
-
-
-
-
-

Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)	Dimmable
S9046SM/C WW WH	240	9	800	3000	60	YES
S9046SM/C DL WH	240	9	850	6000	60	YES


Technical Specification

Model No.	CRI	Body Colour	Diameter (mm)	Dim (mm)
S9046SM/C WW WH	80	WHITE	152	152(W) x 145(H)
S9046SM/C DL WH	80	WHITE	152	152(W) x 145(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



Dimensions

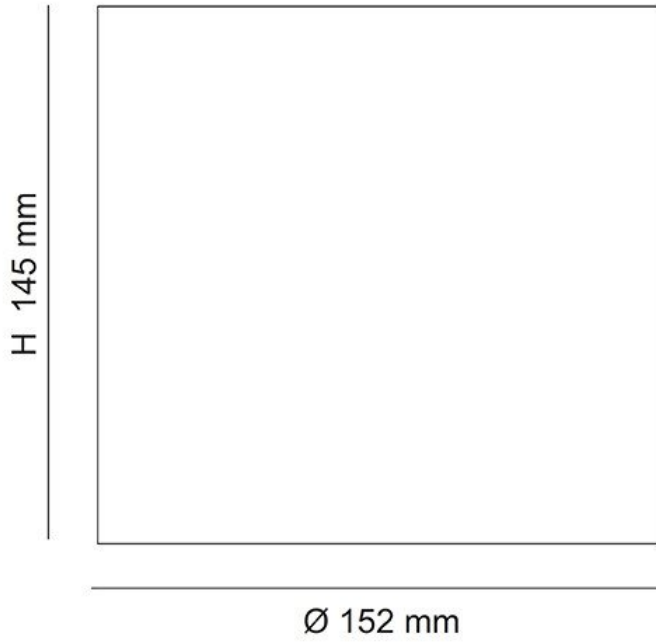



Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

S9046SM/C WW at 3000K

