



## EMERGENCY EXIT SELK1500EX2 - 5.6W

SELK1500EX2 Emergency Exit 24 metre viewing

### Application

A perfect choice for apartments or commercial spaces

### Design Specifications

- Compliant to AS/NZS 2293, emergency lighting with a viewing distance of 24 metres
- Polycarbonate body profile, IP20, integral 5.6 watt emergency control gear with long life Lithium battery technology
- Multi-directional decals included
- Versatile design to allow ceiling or wall mount installation, with quick connect removable decal housing.
- Guaranteed 90 minutes emergency function.
- Optional recessed mounting (SELK1500EX-2RC/P) and (end mounting) wall brackets (SELK1500EX2WM/P) available




### Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	CCT (K)	Body Colour	Dim (mm)
SELK1500EX2	EMERGENCY EXIT 5.6W 24m VIEW 90min	240	5.6	6000	WHITE	330(L) x 245(H)
SELK1500EX2WM/P	EMERGENCY EXIT WALL BRACKET END MOUNT					
SELK1500EX2RC/P	EMERGENCY EXIT RECESSED BRACKET					

Note: Battery warranty twelve (12) months

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

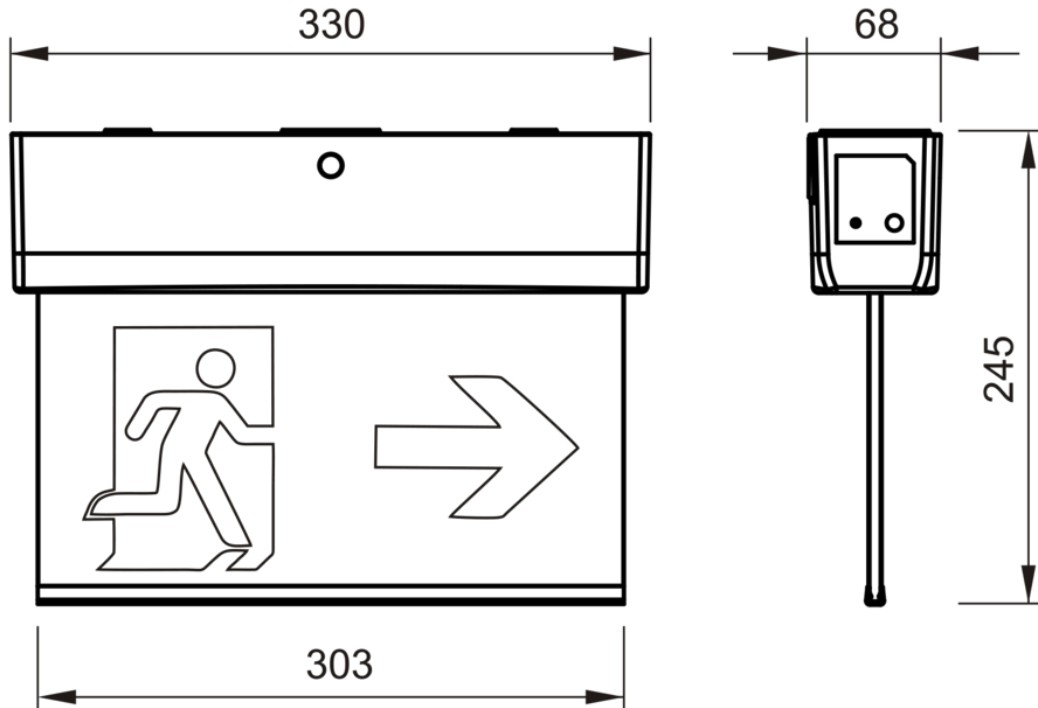

## Product Images

