


LED FLOOD LIGHT

SE7060, SES7060 STARGEM II



DIMENSIONS

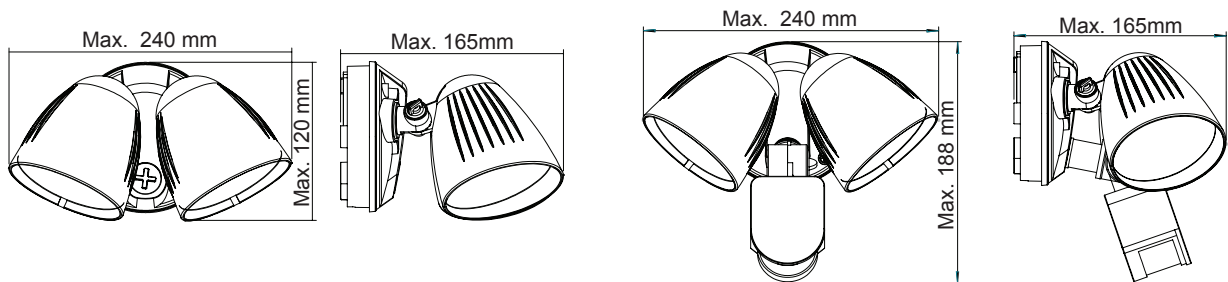

CONSTRUCTION

- Independently adjustable heads
- Polycarbonate body and base
- Opal polycarbonate diffuser
- High efficiency SMD LED chips
- Built-in constant current non-dimmable LED driver

- Built-in infrared motion sensor with override function (SES7060 only)
- Installation height: 1.5-3.5 m

IP RATING

- IP54 weatherproof

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	Sensor
SE7060NDL/BK	240V	2x10W	2x800lm	5000K	100°	>80	Black	No
SES7060NDL/BK	240V	2x10W	2x800lm	5000K	100°	>80	Black	Yes

SENSOR SPECIFICATIONS

Power Source	Detection Range	Detection Angle	Working Temperature	Time Setting	Lux Threshold	Power	Detection Motion Speed
240V	12 m @ 2.5 m height	180°	-10°C~+40°C	10sec-4min	10-2000lux	0.45W (Static 0.1W)	0.6-1.5 m/s